



This Quick Installation is meant to help you to install the product easily and quickly. For detailed instructions on installation, configuration, and further setup options, please consult the Technical Reference Manual.

Package Contents



- One Intelligent Telephone Adapter Model ITA-100
- One Power Adapter +12Volts DC, 500 mA
- One RJ-45 10/100 Base T Cable
- One RJ-11 Telephone Cable
- Quick Installation Guide

***Intelligent Telephone Adapter
Model ITA-100
Dial-up VoIP Adapter***

Quick Installation Guide

1 Connect the ITA-100


A Connect the PSTN telephone line from the wall jack to the **LINE** port of the ITA-100 using a RJ-11 telephone cord.

B Connect one end of the Ethernet network cable to the **LAN** port of the device, and the other end to the Ethernet port of the PC.

C Connect an analogue telephone set to the **Phone** port of the device using an RJ-11 cable.

D Connect the AC Power Adapter to the **Power** and the other end into an electrical outlet to turn on the ITA-100

Power on PC

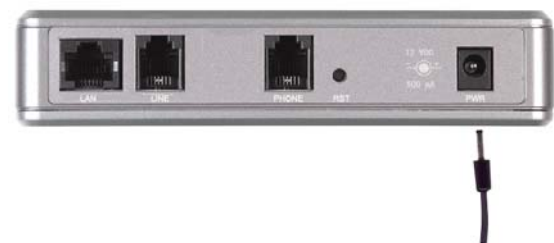


Important:

Make sure you use the power adapter that is supplied with the ITA-100. Using a different power adapter could damage the ITA-100.

2 Configuring the ITA-100

These instructions will show you how to access and configure the ITA-100.

- A** Open the web browser in your PC. Enter `http://192.168.10.1` in its Address field. Press the Enter key.
- B** A login screen will appear. Enter the default Username, **admin** and Password, **admin**, in lowercase letters in the Username and Password fields. (For added security, you should later set a new password in the Maintenance tab). Then click the Login button.
- C** To configure the Dial-up connection, go to the WAN/ LAN Configuration tab. Complete the username, password, country and dial-up phone number fields provided by your ISP.

Address 

A



InterEdge
ITA-100

Unit Information	WAN/LAN Configuration	Maintenance
Unit Information		
Date/Time (Firmware)	Aug 28 2005 21:30:52	
Firmware Version	ita100-isp-ver4.1.2.3	
Boot Version	3.1.0.13-Nov 18 2004	
Backup Version	ita100-default-ver4.1.0.1	
MAC Address	00-0F-24-00-00-20	
Serial Number	ITA100-dbrmyy100xxxx	
WAN Interface Configuration		
WAN IP Address:	0.0.0.0	
WAN Subnet Mask:	0.0.0.0	
WAN Gateway:	0.0.0.0	
Connection Status:	CONNECTING...	

B



InterEdge
ITA-100

Unit Information	WAN/LAN Configuration	Maintenance
WAN Interface Configuration		
IP Address Assignment:	PPP	
Login:	ta100	
Password:	*****	
Phone Number:	1711517	
Country:	MALAYSIA	
PSTN Call Prefix:	55	
Internet Connect Code:	66	
Internet Disconnect Code:	77	
Primary DNS:	203.121.16.85	
Secondary DNS:	203.121.16.120	
Domain Name:	domain	
LAN Interface Configuration		
Enable Local DHCP Server:	<input checked="" type="checkbox"/>	
Local IP Address:	192.168.10.1	
Subnet Mask:	255.255.255.0	
Start IP Address:	192.168.10.100	
No of Address:	10	
DHCP Address Range:	192.168.10.100 to 192.168.10.110	
Client Lease Time:	0 minutes(0 means one day)	
<input type="button" value="Update"/>		

ITA-100 Quick Installation Guide

D Click on the Update button to save the settings. Click on the Continue Link if you wish to continue configure ITA-100.

E If the user wants to obtain full access to all the web pages to configure SIP and other server information, he has to enter the super password in the password field. Super password is created using the following combination, the last 2 digits of the MAC address plus the 7th and 8th digits of the MAC address followed by **ieta100**. For example:
MAC address = 000f26001f88 the password will be **8800ieta100** password is in lower case.

To configure the VoIP Number, go to the SIP Configuration tab. Enter the SIP Proxy, VoIP number and password field. Click on the Update button to save your changes.

F Reset ITA-100 to save the settings.



D



E